



P0024端子承认书图面


名　　称	材　　料	附　　注
端子 Terminal	Brass	



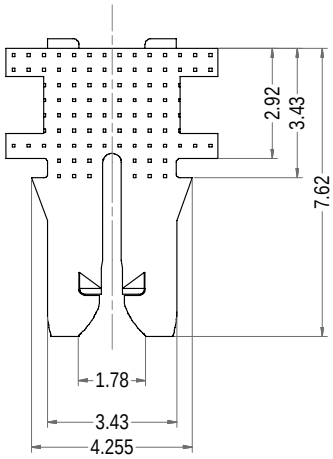

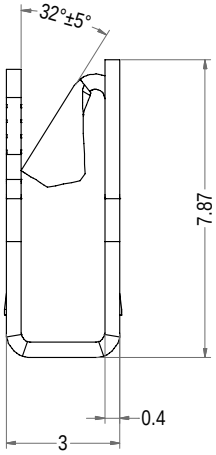

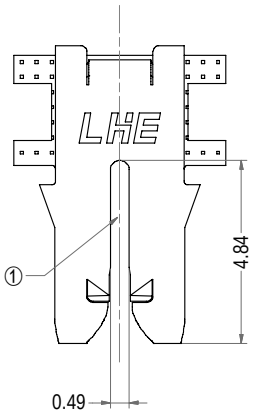

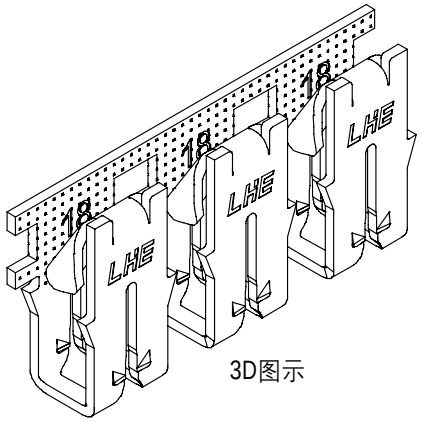

3D图示

注释:
①插槽可端接单根或双根同规格、同类型漆包线.
铜线范围:0.64~0.81mm [#22-#20 AWG].
铝线范围:0.67~0.91mm [#22-#19 AWG].
铝线范围仅适用于后镀锡型号.
②刺破式接口适配 0.81~1.02mm [#20-#18 AWG] 实心线或熔接绞合引线.
①Slot terminates either a single or double manget wire of the same size and type.
Copper range 0.64~0.81mm[#22-#20 AWG].
Aluminum range 0.67~0.91mm[#22-#19 AWG].
Aluminum wire range is applicable for post Tin plated part numbers only.
②Poke-in accepts a 0.81~1.02mm[#20-#18 AWG] solid or fused stranded lead wire.

Part No.	Description	Finish	Qty/reel
P0024-T13B	P0024-T13	Tin-plated	12,000pcs

LHE® 浙江联和电子有限公司			
品名	P0024-T13	比例	5 : 1
料号	P0024-T13B	未注公差(mm)	
图号	/	>0~3	±0.12
材料	Brass	>3~18	±0.15
制图	石 尉 2025-12-30	>18~50	±0.3
审核	天琴 2025-12-30	>50~120	±0.5
批准	季育文 2025-12-30	X°	±3°
视角		X.X°	±0.5°